

Power


Extensive studies on the materials used and their dimensioning ensure that the **ROCCIA** plate rolls **can never be thrown into crisis**, even when they perform the toughest jobs. Increased structural sections, high driving torque and thrust of bending rolls and strong and efficient support of the machine yoke, these expedients guarantee a greater rigidity of the machine during cone rolling process.



Reliability

Reliability is achieved by attention to many details, such as:

- It is important to maintain a regulated hydraulic oil temperature, if the a hydraulic oil system overheats, it then reduces plate roll performance. **ROCCIA** plate rolls are fitted with an oil cooling heat exchanger, monitored by electronic indicators.
- Electronic indicators for low hydraulic oil level and filter failure due to excessive debris contamination [clogging].
- Every design calculation of a **ROCCIA** machine is generously increased by 20% to ensure that a **ROCCIA** plate roll-

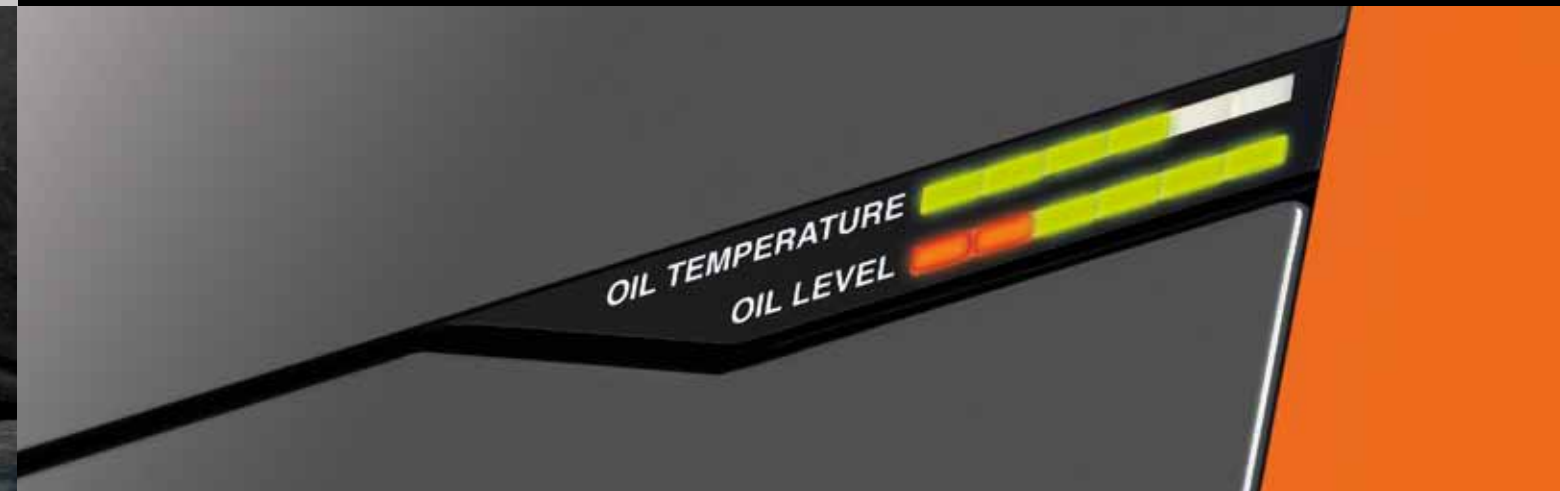

Precision

All the steel parts required are produced on modern CNC machinery to ensure constant *within* tolerance results.

Pivot points for the connection of the swing arm system, hydraulic cylinders, the yoke, utilize high static load bearings and (self-lubricating bushings), **being virtually maintenance free**.

Encoders are attached to each end of the pinch side rolls, these encoders are used to individually monitor each pinch side rolls position and parallelism relative to the top roll. The encoders operate in unison with the machines PLC and electro-hydraulic valving.

The PLC receives inputs from the encoders, recognising the actual position against a required position, the PLC sends a control voltage to the electro-hydraulic valve(s), the electro valving then is activated to adjust the hydraulic oil flow to the pinch side rolls to maintain or move to a desired DRO or CNC axis position.

Info and contacts:
ROCCIASRL.COM



Why Roccia?

Experience does matter. At **ROCCIA** we have a group of experienced engineers designers and specialized build personnel, who combine together to obtain the best out of every single project.

- **Superior quality, reliability and performance**
- **Stock parts and after sales service support**
- **ROCCIA** is aware how important it is to resolve breakdown issues & quickly resume production. Thanks to our in house technicians, stock parts & worldwide dealer organization, we offer a responsive & quick feed back to minimise any machine down time.

Your choice to superior productivity & reliability, it has to be ROCCIA Rundbiegen.



Fraz. Tetti Paglieri n. 9 • 12040 Cervere CN • Italy
Phone **+39 0172 474388** • Fax +39 0172 474324
info@rocciasrl.com • **www.rocciasrl.com**

collaborerivoccia.com



PERFECTION
DOES NOT ALLOW FOR COMPROMISE



HR3WS VARIABLE
GEOMETRY

Style

The **ROCCIA** plate rolls modern design lines subtly communicate that here is a high tech plate rolling machine that will deliver exactly what its specification states: a **high tech specification**, proven and reliable components, robustness of construction, ease of use, value for your money. From first sight the **ROCCIA** plate roll stands out from all other plate rolling machines, it is the outcome of a precision design, graphical analysis and 3D modeling, plus that all important ingredient, hands on plate rolling knowledge accumulated over many years.



Detail of the rear view of HR3W and HR4W models

Commitment

Striving to achieve perfection requires constant attention to many details, ongoing excellence in design technology, vigilance in the fabrication and machining procedures, use of proven and reliable components, a focused team of build technicians, a sales team **listening and interacting with customers**. At **ROCCIA** we are proud to say that we have this commitment to our product in abundance, it is what makes a **ROCCIA** plate rolling machine stand out from its competitors.



Technology

The wide **BASED ANGLED FRAME** bulkhead construction is designed to bring increased stability to the whole structure, designed by **ROCCIA** engineers to absorb side thrust forces during plate rolling cycles.


A **ROCCIA** 3 roll machine utilizes 3 driven rolls to ensure the rolling torque power transfer. Single unit high torque hydraulic **MOTORS/PLANETARY GEAR-BOXES** are directly mounted onto each driving roll to ensure a smooth feed through of the plate, there is no loss of power normally associated with secondary transmissions, plus the added benefit of one less gearbox to maintain.

THREE ROLL VARIABLE AXIS PLATE BENDING MACHINES are used for bending medium to thick plates. They are very precise and easy to use. There are advantages by using this system where the two side rolls move horizontally - left and right, while the top roll moves up and down. When feeding the material into the machine it does not tilt up like it would on a double pinch three roll bender, but stays parallel to the ground allowing easier and safer material handling. When positioning the side rolls at their farthest position, you can increase the rolling capacity by up to 50% more than on a traditional 3 or 4 roll bending machine. Three driving rolls offer full control over the bending process.



ERGONOMIC CONTROL PANEL
As place your hands on the control console, you will immediately be aware that all the controls are exactly where you would expect them to be.

CLEANLINESS AND ORDER
in the hydraulic and electrical parts of our machine express the attention to detail we put into our product.

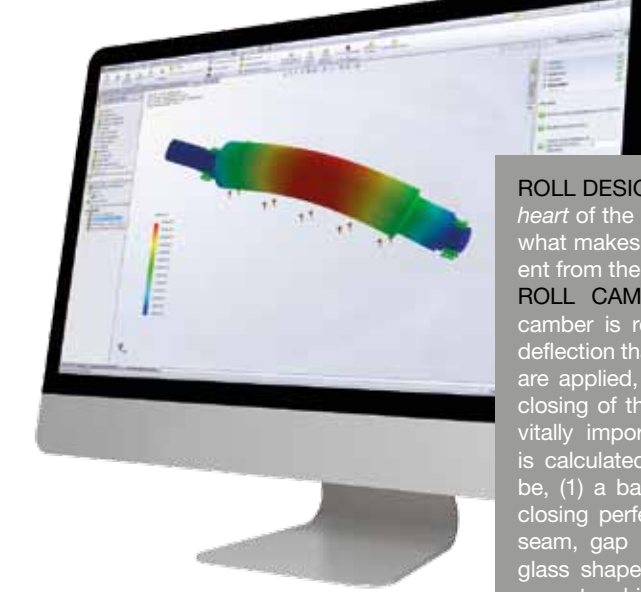

ROLL DESIGN CALCULATION. It is the *heart* of the machines performance; it's what makes a **ROCCIA** plate roll different from the competition.

ROLL CAMBER CALCULATION. Roll camber is required to counter act roll deflection that occurs as bending forces are applied, so as to ensure a perfect closing of the longitudinal seam, it is a vitally important factor. If the camber is calculated incorrectly, the result will be, (1) a barrel shaped cylinder ie not closing perfectly along the longitudinal seam, gap in the middle, (2) an hour glass shaped cylinder, the longitudinal seam touching in the middle, but not at the ends.

ROCCIA roll dimensioning camber calculation are done on sophisticated 3D cad software that produces all the critical data required for every step of the rolling process. Roll calculations are seldom to standard formulae, no, they are calculated around customer requirements, this being, material type, mechanical strength, material thickness, the rolls cylinder length dimension. Only this way can we grant the performance and the precision of the plate rolling machine we manufacture for you.

By having **THREE INDEPENDENTLY DRIVEN ROLLS** it assures a firm and smooth feeding of the material through the machine which is a key feature of our HR3WS models.

This system is clean, maintenance free and efficient. By not using gears or chains you will not have a loss in torque as you would in an ordinary transmission driven plate bender. The hydraulic motors and gear boxes are coupled directly on the rolls.

Smart machines

With the **OP.TIME** technology **ROCCIA** Rundbiegen plate rolls offer **up to 20% of energy saving**, when compared to traditional plate rolling machines. Our plate rolls use a **friction free swing arm**

POWERED BY
op.time

system to position the pre bend rolls, no friction, no power absorbed. When the machine is not in use for a period of 5 minutes an **electronic control sets the machine into a "stand by mode"**.

CNC control



Three different software options for **three different levels of CNC control**. Written and then fully tested and optimized on our plate rolling machines, by

our **team of engineers**, always with our customers requirements to the forefront. The layout of every operation function window is clear and **user friendly**.

Balance

Each **ROCCIA** machine is the result of **balance** between high precision machining, controlled assembly procedures, customized hydraulic and electronic components, in order to obtain **robust and precise plate rolls**, manufactured without compromise.

 **Mechanical Strength**

 **Hydraulic Power**

 **Electronic Precision**